
Point Pod Multi Point Pod Compact Point Pod Compact with USB 11. 00. Point Pod Boardrom 00. L

Point Pod Multi	Point Pod Compact	Point Pod Compact with USB	Point Pod Boardrom		
Colour: Anodised Aluminium	Anodised Aluminium	Anodised Aluminium	Anodised Aluminium		
Silver - with white sockets and surrounds	Silver - with white sockets and surrounds	Silver - with white sockets and surrounds	Silver - with white sockets and surrounds		
Black - with black sockets and surrounds	Black - with black sockets and surrounds	Black - with black sockets and surrounds			
Material: Polyamide and ABS	Polyamide and ABS	Polyamide and ABS	Polyamide and ABS		
Warranty: 2 year Australian Warranty on all parts and labour	2 year Australian Warranty on all parts and labour	2 year Australian Warranty on all parts and labour	2 year Australian Warranty on all parts and labour		
Dimensions					
Hole Size: 100mm Diameter	100mm Diameter	100mm Diameter	100mm Diameter		
Inner Disc: 92mm	92mm	92mm	92mm		
Space Required in cabinet:					
550mm depth, 160mm in diameter at mounting flange, 100mm for body	450mm depth, 160mm in diameter at mounting flange, 100mm for body	450mm depth, 160mm in diameter at mounting flange, 100mm for body	550mm depth, 160mm in diameter at mounting flange, 100mm for body		

Packaging size:					
770mm x 200mm x 140mm LxWxH	670mm x 200mm x 140mm LxWxH	670mm x 200mm x 140mm LxWxH	770mm x 200mm x 140mm LxWxH		
Weight: 3.2kgs	3.1kgs	3.1kgs	3.2kgs		
Socket Configuration:					
3 x Australian outlets, 2 x 2.1a USB charging outlets	2 x Australian outlets (Customisable)	1 x Australian outlets 2 x 2.1a USB (Customisable)	2x Australian outlets, 1 x HDMI, 1 x Data (Cat5), 2 x USB 2.1a		
Cable Length: 1.9m	1.9m	1.9m	1.9m		
Electrical Data					
Supply Voltage:					
110-240ac 50Hz	110-240ac 50Hz	110-240ac 50Hz	110-240ac 50Hz		
Max Current: 10a or 2400W	10a or 2400W	10a or 2400W	10a or 2400W		

Total load connected not to exceed rating All Point Pods have an overload switch For indoor use only Aproval no. GMA-504353-EA IP rating - IP44 Designed and engineered in Australia Made in China

Point Pod Multi

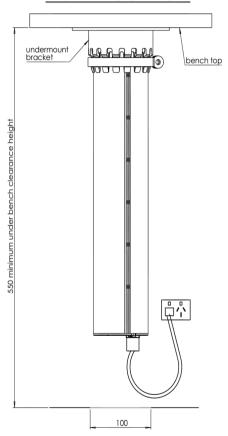

Point Pod Compact

